
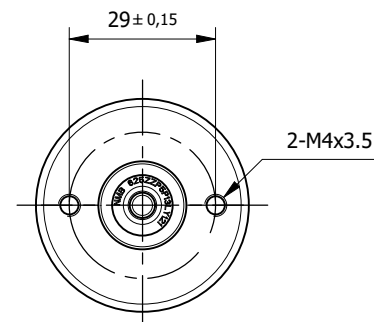


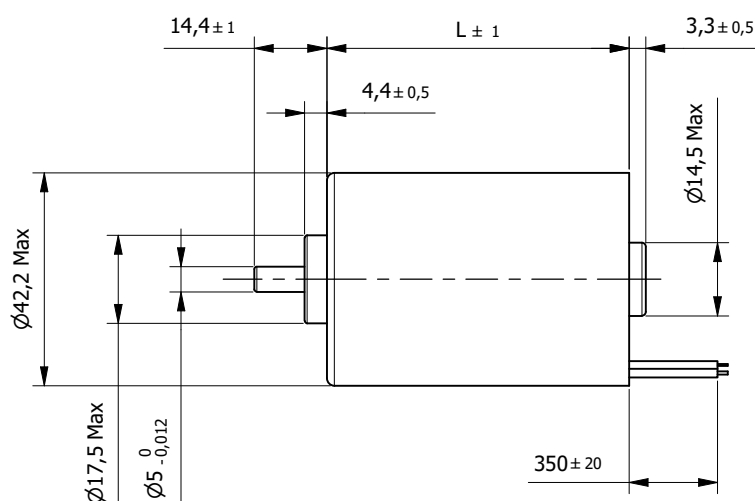


Specification		
Model	42CBL60	
1 n° of Pole		4
2 n° of Phase		3
3 Rated Voltage	V	24
4 Rated Speed	rpm	5900
5 Rated Torque	Nm	0,068
6 Max. Peak Torque	Nm	0,2
7 Torque Constant	Nm/A	0,032
8 Rated Current	A	2,13
9 Max. Peak Current	A	6,6
10 No-Load Current	mA	430
11 Line to Line Resistance	Ω	0,66
12 Line to Line Inductance	mH	0,63
13 Rotor Inertia	gcm ²	44
14 Length (L)	mm	60
15 Weight	Kg	0,35

Characteristics	
Item	
Hall Effect Angle	120°
Shaft run out	0,025mm
Insulation Class	B
Protection Class	IP40
Radial play (450g load)	0,02mm
Axial play (450g load)	0,08mm
Max. Radial force (10mm from flange)	15N
Max. Axial force	10N
Dielectric strength (for 1 min.)	500 VDC
Insulation Resistance (min. 500 VDC)	100 Mohm

Standard Combination	
Gearbox	Drive
GYP42	Gemini
42JMS	

* other options on request

Connection			
Lead n°	Color	Gauge	Function
1	Red	UL1430 AWG26	VCC Hall +5 to +24VDC
2	Blue		Hall A
3	Green		Hall B
4	White		Hall C
5	Black		GND Hall
6	Yellow	UL1332 AWG22	Phase U
7	Red		Phase V
8	Black		Phase W

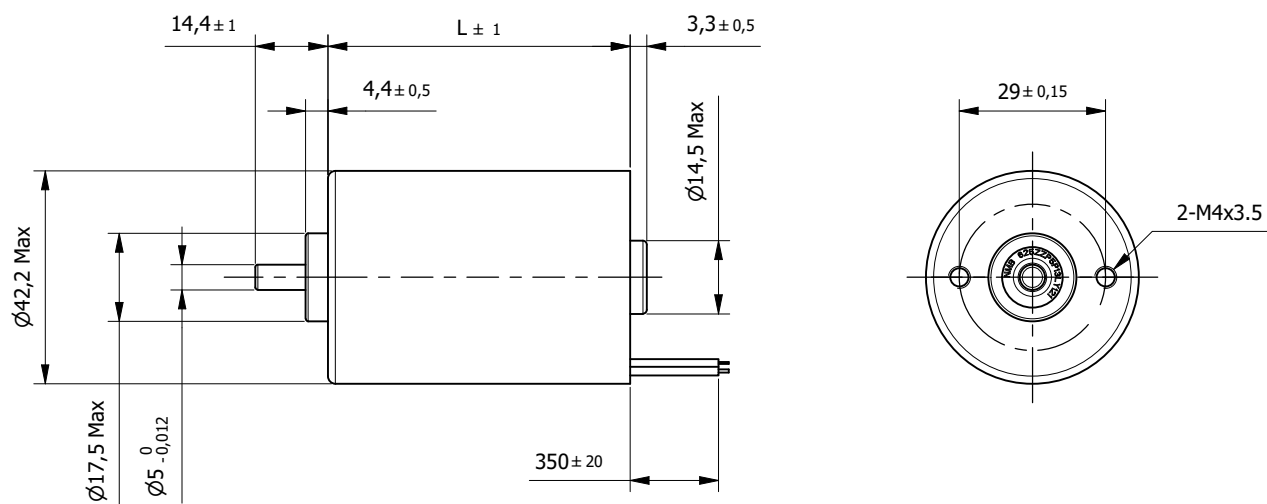


Specification		
Model		42CBLA60
1	n° of Pole	8
2	n° of Phase	3
3	Rated Voltage	V 24
4	Rated Speed	rpm 3200
5	Rated Torque	Nm 0,12
6	Max. Peak Torque	Nm 0,36
7	Torque Constant	Nm/A 0,054
8	Rated Current	A 2,1
9	Max. Peak Current	A 6,3
10	No-Load Current	mA 300
11	Line to Line Resistance	Ω 1,2
12	Line to Line Inductance	mH 1,6
13	Rotor Inertia	gcm2 44
14	Length (L)	mm 60
15	Weight	Kg 0,35

Characteristics	
Item	
Hall Effect Angle	120°
Shaft run out	0,025mm
Insulation Class	B
Protection Class	IP40
Radial play (450g load)	0,02mm
Axial play (450g load)	0,14mm
Max. Radial force (10mm from flange)	15N
Max. Axial force	10N
Dielectric strength (for 1 sec.)	650 VAC
Insulation Resistance (min. 500 VDC)	100 Mohm

Standard Combination	
Gearbox	Drive
GYP42	Gemini
42JMS	

* other options on request

Connection			
Lead n°	Color	Gauge	Function
1	Red	UL1430 AWG26	VCC Hall +5 to +24VDC
2	Blue		Hall A
3	Green		Hall B
4	White		Hall C
5	Black		GND Hall
6	Yellow	UL1332 AWG22	Phase U
7	Red		Phase V
8	Black		Phase W

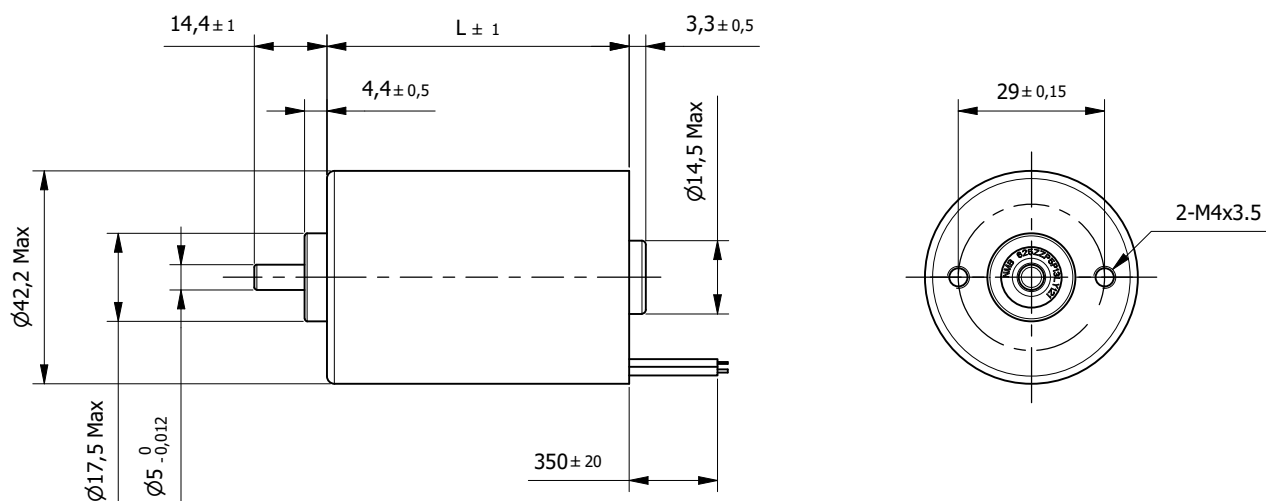

Specification		
Model	42CBL66	
1 n° of Pole		8
2 n° of Phase		3
3 Rated Voltage	V	24
4 Rated Speed	rpm	4000
5 Rated Torque	Nm	0,15
6 Max. Peak Torque	Nm	0,45
7 Torque Constant	Nm/A	0,04
8 Rated Current	A	3,75
9 Max. Peak Current	A	11,2
10 No-Load Current	mA	400
11 Line to Line Resistance	Ω	0,75
12 Line to Line Inductance	mH	0,8
13 Rotor Inertia	gcm ²	55
14 Length (L)	mm	66
15 Weight	Kg	0,44

Characteristics	
Item	
Hall Effect Angle	120°
Shaft run out	0,025mm
Insulation Class	B
Protection Class	IP40
Radial play (450g load)	0,02mm
Axial play (450g load)	0,14mm
Max. Radial force (10mm from flange)	15N
Max. Axial force	10N
Dielectric strength (for 1 sec.)	650 VAC
Insulation Resistance (min. 500 VDC)	100 Mohm

Standard Combination	
Gearbox	Drive
GYP42	Gemini
42JMS	

* other options on request

Connection			
Lead n°	Color	Gauge	Function
1	Red	UL1430 AWG26	VCC Hall +5 to +24VDC
2	Blue		Hall A
3	Green		Hall B
4	White		Hall C
5	Black		GND Hall
6	Yellow	UL1332 AWG22	Phase U
7	Red		Phase V
8	Black		Phase W